

TOE TERMINATION
NOT TO SCALE

International Erosion
Control Systems, Inc.

www.iecsusa.com

3030 N. Rocky Point Drive, Suite 150, Tampa FL. 33607

855-768-1420 855-768-1425 FAX




MARK:	DATE:	REVISION DESCRIPTION:	BY:

Cable Concrete
CC 45


STANDARD TERMINATION and
CONNECTION DETAILS


SHEET #:	OF CC2
	DD
CHECKED BY:	APPROVED BY:
	MDD
DESIGNED BY:	DRAWN BY:
	9/5/2019
PROJECT #:	DATE:

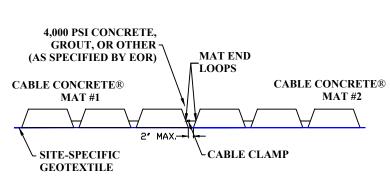

PROFILE VIEW

WHEN PLACING THE MATS, THE GAP BETWEEN THE MATS SHOULD NOT BE ANY LARGER THAN A 2" MAXIMUM, IF THE MATS ARE PLACED WITH A LARGER SPACE THAN 2", IT IS RECOMMENDED TO PLACE 4,000 PSI CONCRETE, GROUT, OR OTHER (AS SPECIFIED BY EOR) IN THE SEAM BETWEEN THE MATS.

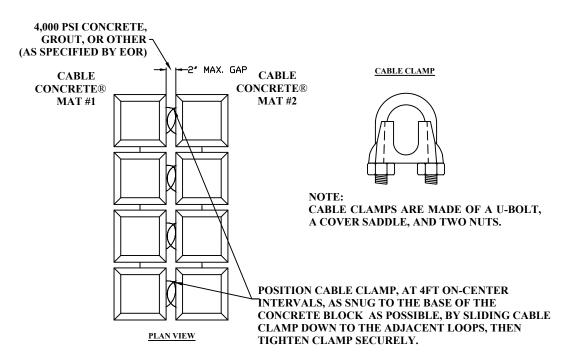

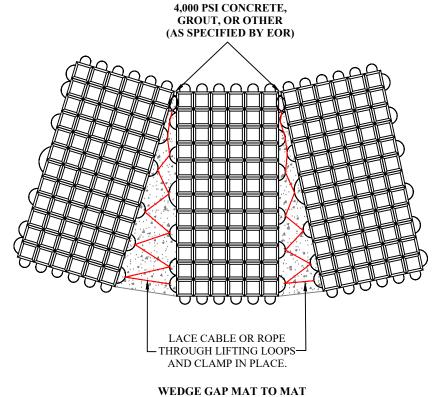

CABLE CLAMP / MAT CONNECTION DETAIL



CONNECTION DETAIL

**International Erosion** Control Systems, Inc.

www.iecsusa.com

3030 N. Rocky Point Drive, Suite 150, Tampa FL. 33607

855-768-1420 855-768-1425 FAX



MARK:	DATE:	REVISION DESCRIPTION:	BY:	
				l

Cable Concrete CC 45

STANDARD TERMINATION and CONNECTION DETAILS

SHEET #:	L
	DD
CHECKED BY:	APPROVED BY:
	MDD
DESIGNED BY:	DRAWN BY:
	9/4/2019
PROJECT #:	DATE: